




VRT3 - VALVOLA DI REGOLAZIONE PRESSIONE CON BY PASS UNLOADER VALVE - VRT3

NOTA INTEGRATIVA – FEATURES

- Valvola di non ritorno esagonale per una migliore scorrevolezza
 - *Hexagonal check valve for a better smoothness*
- Fermo di sicurezza alla massima pressione
 - *Safety lock at the maximum pressure*
- Fermo regolazione pressione Minimo e Massimo nella versione con manopola
 - *Regulation lock for Minimum and Maximum pressure in the knob version*
- Molla regolazione di nuovo concetto
 - *Regulation spring of new concept*
- Nuovo corpo con alloggiamento interno dell'O-ring nel ramo mandata per una maggiore resistenza
 - *New body with inner housing of O-ring in the outlet for a higher resistance*

MISURE D'INGOMBRO – OVERALL DIMENSIONS

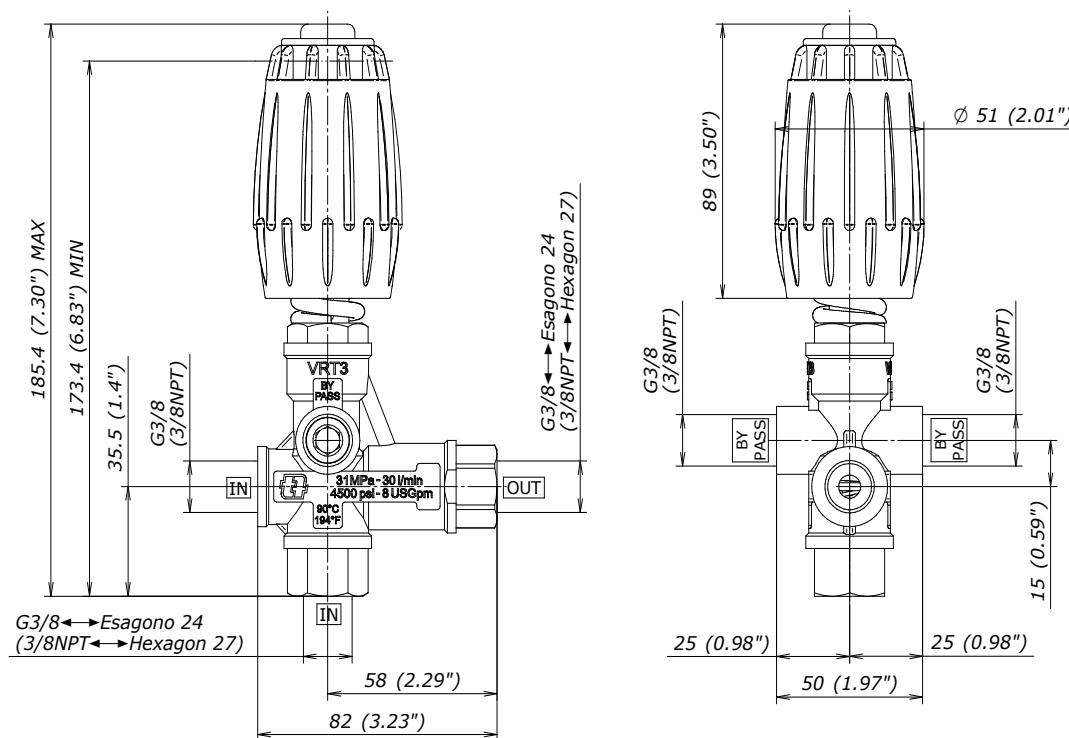

PORTATA MASSIMA
MAX FLOW RATE

40 l/min
10,5 USGpm

TEMPERATURA MASSIMA
RATED TEMPERATURE

90°C
194°F

CODICE (CODE)	COLORE MOLLA (SPRING COLOR)	PRESSIONE NOMINALE (RATED PRESSURE)	PRESSIONE AMMISSIBILE (PERMISSIBLE PRESSURE)	ENTRATA/ BY PASS(INLET/ BY PASS)	USCITA/ (OUTLET)	PESO (WEIGHT)
0215010240	Giallo/Yellow	14 MPa – 2030 psi	16 MPa – 2320 psi	G 3/8 F	G 3/8 F	796 g – 28.08 oz
0215010250	Blu/Blue	22 MPa – 3190 psi	25 MPa – 3630 psi	G 3/8 F	G 3/8 F	810 g – 28.57 oz
4072000015	Blu/Blue	22 MPa – 3190 psi	25 MPa – 3630 psi	G 3/8 F	G 3/8 M	823 g – 29.03 oz
0215010260	Nero/Black	28 MPa – 4060 psi	31 MPa – 4500 psi	G 3/8 F	G 3/8 F	810 g – 28.57 oz
0215010300	Giallo/Yellow	14 MPa – 2030 psi	16 MPa – 2320 psi	3/8 NPT F	3/8 NPT F	826 g – 29.14 oz
0215010310	Blu/Blue	22 MPa – 3190 psi	25 MPa – 3630 psi	3/8 NPT F	3/8 NPT F	840 g – 29.63 oz
0215010320	Nero/Black	28 MPa – 4060 psi	31 MPa – 4500 psi	3/8 NPT F	3/8 NPT F	840 g – 29.63 oz